



## REGENERATIVE BATTERY PACK TEST SYSTEM MODEL 17040E

Chroma 17040E Regenerative Battery Pack Test System is a high-precision system specifically designed for secondary battery module and pack tests. The energy regenerative function greatly reduces power consumption during discharge, and ensures a stable power grid without generating harmonic pollution on other devices - even under dynamic charge and discharge conditions. Where traditional equipment discharges waste energy in the form of heat, Chroma 17040E can recycle the electric energy discharged by the battery module back to the grid, thus reducing waste energy and alleviating HVAC requirements.

The 17040E has built-in parallel channels and dynamic profile simulation functions. The parallel capability maximizes the charge and discharge current and power, thus increasing the efficiency and flexibility of equipment utilization. The dynamic profile simulation allows users to load a battery waveform of a given drive profile in either current or power mode to meet the NEDC/FUDS requirements.

Its bidirectional architecture assures uninterrupted current during the charge and discharge transient state so that the driving conditions can be accurately simulated in line with the ISO, IEC, UL, and GB/T international test standards.

Equipped with Chroma's powerful Battery Pro software, the test system offers flexible test editing functions to perform independent channel tests, and conforms to various requirements for testing secondary battery packs with high safety and stability.

Chroma 17040E ensures protected charge/discharge testing through multiple safety features including Over Voltage Protection, Over Current Protection, Over Temperature Protection, and external parameter detection. The recovery functions prevent that test data is interrupted or lost in the case of power failure.




## MODEL 17040E

### KEY FEATURES

- Meets international standards for battery testing: IEC, ISO, UL, and GB/T, etc.
- Regenerative battery energy discharge (Eff. >90%, PF >0.95, I\_THD <5%)
- Auto-ranges with multiple voltage and current ranges for optimal resolution
- High accuracy current/voltage measurement  
±0.02% r.d.g. + 0.02% r.n.g.  
±(0.05% of r.n.g.)
- Current slew rate (10%~90%)  
1ms (100kW~600kW)  
10ms (800kW~1.2MW)
- Dynamic (current/power) driving profile simulation tests for NEDC, FUDS, HPPC
- Test channel parallel function
- Test data analysis function
- Data recovery protection (after power failure)
- Automatic protection for abnormalities
- Battery simulator (option)
- High power test equipment  
Voltage range: 100~1700V  
Current range: 0~4800A  
Power range: 0~1.2MW
- Customized integration functions
  - Integrated temperature chamber
  - BMS data analysis
  - Multi-channel voltage/temp. recording

### FIELDS OF APPLICATION

- Power battery module
- Energy storage system
- Motor driver
- Power control system

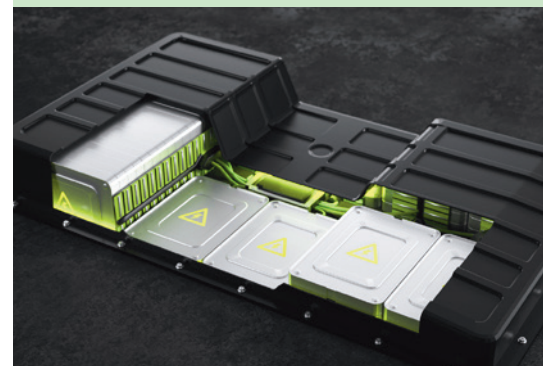

**Chroma**

## SYSTEM FEATURES

Specifically designed for secondary battery module and pack tests, Chroma 17040E Regenerative Battery Pack Test System offers ultimate precision, safety, and efficiency. The main features include recycled energy, parallel channels, high power for battery applications, and high accuracy in voltage and current measurement as well as drive cycle simulation.



Precision

### High-precision Measurements for Improved Product Quality

The auto voltage/current range function switches between multiple ranges. When there is a dynamic change between large or small currents, the test system automatically adjusts to the right range to optimize the measurement accuracy.

- Voltage accuracy:  $\pm(0.02\%$  of rdg.  $\pm 0.02\%$  of F.S.)
- Current accuracy:  $\pm(0.05\%$  of r.n.g.)

### High-frequency Sampling for Battery Pack Capacity Capture


The high-frequency sampling measurement technology reaches a 50kHz sampling rate to ensure dynamic measurement accuracy. Other battery chargers and dischargers use software to read current values for power computing; however, limited data sampling speed could result in large errors when calculating the dynamic current capacity. Chroma increased the V/I sampling rate and added a double-sampling integrator, so the 17040E test system is able to provide capacity calculation with much higher accuracy. When the current changes, the data is not lost and the transmission speed is not affected.

- V/I sampling rate: 50kHz (per 20 $\mu$ s)

### Quick Response Testing for Battery Pack Limit Verification


Chroma 17040E supports dynamic driving profile simulation (waveform), which simulates the current and power states of actual driving conditions to comply with NEDC, FUDS, and HPPC standards. The quick current response enables optimized charge/discharge switch control; the current is smooth without overshoot to avoid damage to the battery.

- Current slew rate: 2ms (-90% to 90%)

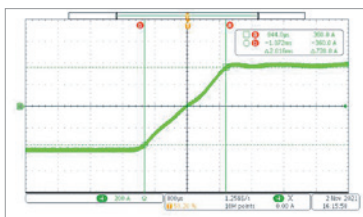

Discharge to charge:

Current slew rate < 2ms (-90% to 90%)

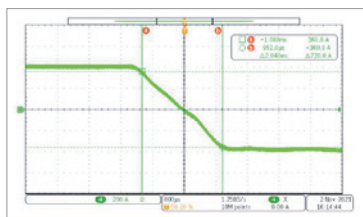


Charge to discharge:


Current slew rate < 2ms (-90% to 90%)

### Dynamic Driving Profiles for Actual Use Simulation

Battery packs are used under quick and irregular current conditions. Chroma 17040E performs actual dynamic charge/discharge waveforms to simulate working conditions and verify the response of the battery pack in real-life applications. Users can set the test steps to read a specific Excel file with stored current/power waveforms.



Compliant with test standards




Profile simulation data loading



Precision




Efficiency




Security

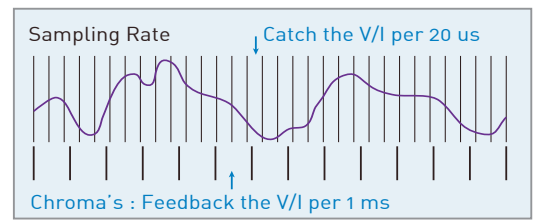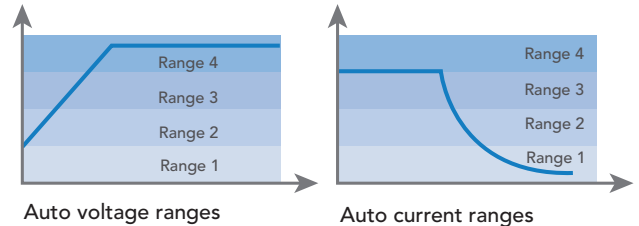

Chroma charging/discharging sampling speed

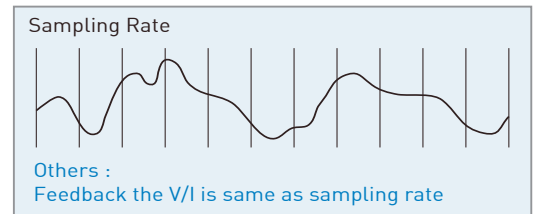

Others' charging/discharging sampling speed

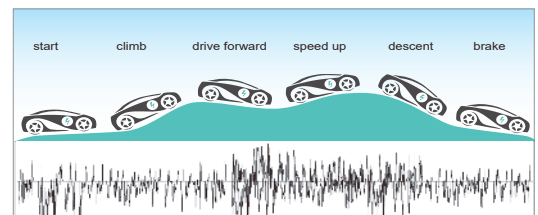

Actual driving profile simulation





## Safety


### Bidirectional Circuit for Power Supply Protection

The bidirectional circuit architecture allows highly efficient recycling of the discharge energy. Chroma 17040E accurately controls reverse current changes, the AC current waveforms are smooth and show changes in real time, and the design meets the grid requirements without contaminating other equipment on the grid. When any abnormalities on the power grid are detected, the test system will swiftly cut off the main circuit power supply to protect its safety.

- Regenerative discharge efficiency > 90%
- Total Harmonic Distortion (THD) < 5%
- Power Factor (PF) > 0.95

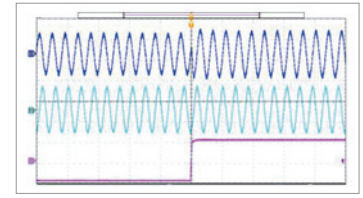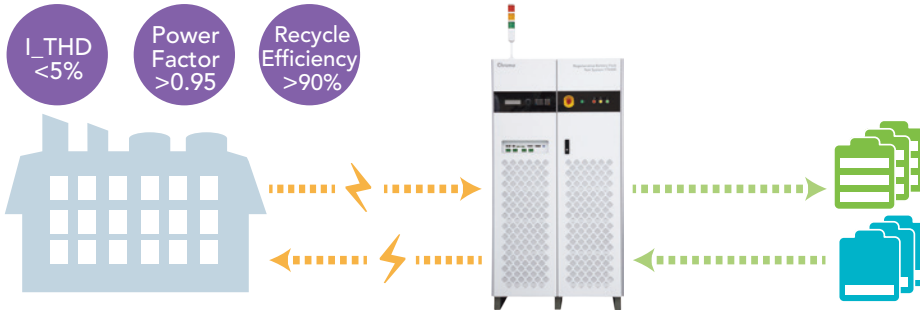

Transition from discharging to charging

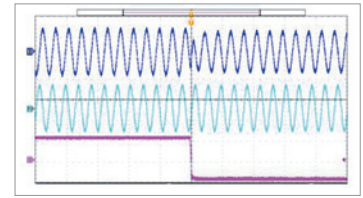

Transition from charging to discharging

### Energy Recovery Design for Personnel Safety (Option)

VDE test requirements, in short, are the main items to consider when the generator is connected to a low-voltage distribution network on the grid. Even when using multiple devices, they can maintain the safe and reliable operation of the grid in accordance with the German Energy Industry Law and with the voltage limits in the DIN EN 50160 regulations. The optional equipment meets the VDE-4105-AE test requirements with the following protection functions:

- Voltage protection:  $V < 0.8U_n$ ,  $< 0.2s$  /  $V > 1.1U_n$ ,  $< 0.2s$  /  $V > 1.15U_n$ ,  $< 0.2s$
- Frequency protection:  $f < 47.5Hz$ ,  $< 0.2s$  /  $f > 1.5Hz$ ,  $< 0.2s$
- Islanding detection: < 5 sec

### Multiple Output Protections for Battery Test Risk Control


Chroma 17040E meets the test requirements for secondary battery packs and offers a high degree of stability and safety. The charge/discharge protection will stop the test when it detects any abnormal test status. The internal firmware and hardware provide multi-layered protection. And the protection parameter of test procedure is loaded into them directly to provide a variety of alarm and protection modes.

- Voltage protection: over charge / over discharge / delta voltage change
- Current protection: over current / over capacity / delta current change
- Other protections: over temperature / wire loss / over power / CC-CV transition time

### Software and Hardware Protections for Battery Cells (Option)

The Chroma BatteryPro software can integrate third-party hardware with charge/discharge protections that will stop the test when detecting any abnormal conditions. A designated datalogger can read the charge/discharge voltage and temperature of multiple cells and use the measured data to set the protection conditions. Similarly, a designated battery management system (BMS) data acquisition system can read multiple sets of BMS data through CAN bus and RS-485 interfaces, and then convert the data for protection conditions. An additional Isolated DIO Card can be integrated in Chroma test system for controlling the high-side/low-side driver signals of device, the function support digital output, digital input, safety channel output, safety input from external devices, and digital input and output for alarms, cut-off, and power off.

- Data logger with test data protection
- BMS data acquisition system with test data protection
- Digital I/O card with signal control

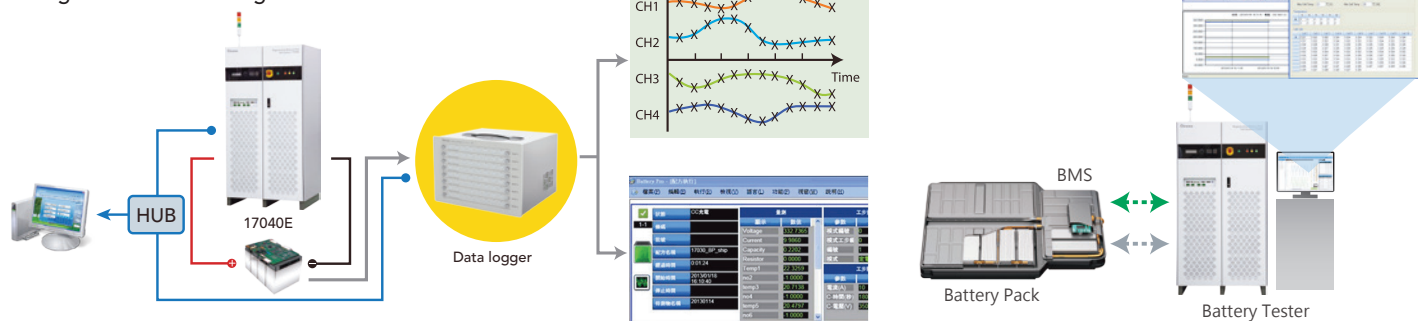




Efficiency

### Flexible Integration for Complete Test Solution

The Chroma BatteryPro software integrates third-party software and hardware, such as BMS communication devices, data loggers, and thermostats; and uses their data to control the test programs and create complete test solutions.

- Thermostat: temperature and humidity control combined with charge/discharge procedures
- Data logger: temperature and voltage status of single battery cells or modules
- MS data recorder: reading BMS data

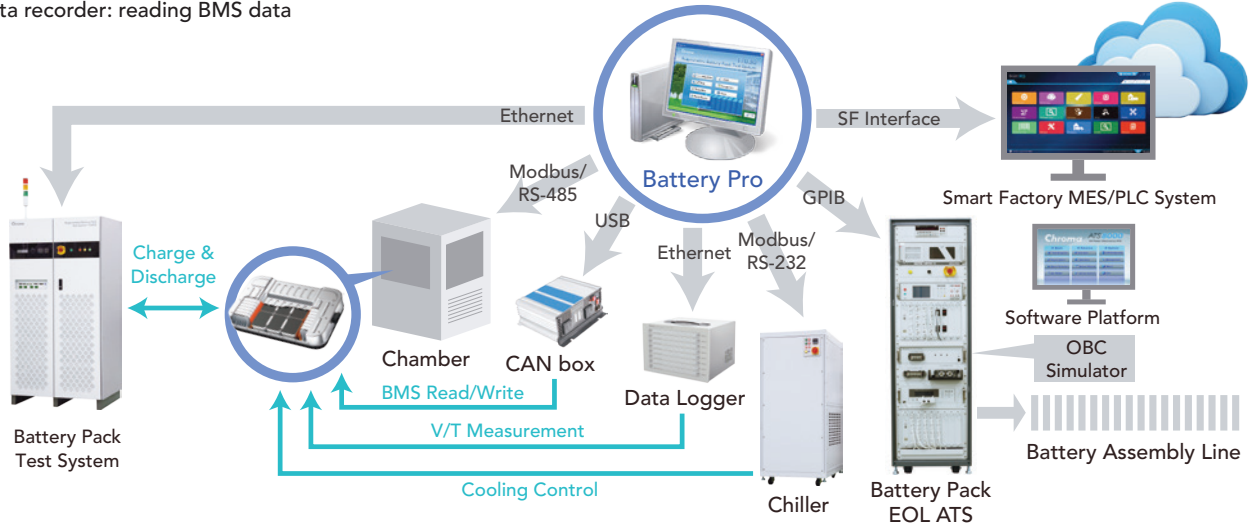

### Multiple Control Commands for Test System Expansion

Users can apply languages such as SCPI and CAN bus commands as well as LabVIEW and LabWindow driver programs to tailor the application software for operating Chroma 17040E. The powerful, versatile architecture allows users to customize and integrate into the automated battery pack test system. The variety of integrational interfaces are for hardware-in-the-loop (HIL) test platform. Such as CAN bus, Ethernet, Analog I/O.




17040E 200kW type


### Parallel Synchronization for High Power Charging (HPC)

Chroma 17040 uses parallel synchronization to perform high-power testing with instant current slew synchronization. There is no delay in the slew time between the main channel and the auxiliary channel, which prevents current staircase waveforms from being generated. Users can connect up to two devices of the same model in parallel, and can operate the channels independently or in parallel. The test system provides customizable fixtures and allows parallel running of the output channels.

- Max. power 1.2MW; max. current 4,800A
- In dynamic current mode (waveform), rated power <600kW, current rise time is 1ms (10%~90%)
- In dynamic current mode (waveform), rated power 800kW~1.2mW, current rise time is 10ms (10%~90%)

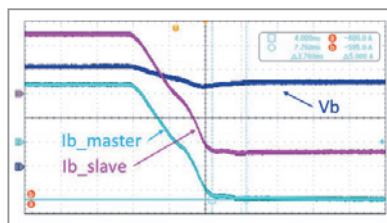

Current Rise Time Waveform in CC Discharge



The VCU simulation function for Battery Pack Verification Chroma 17040E offers the function which is vehicle control unit (VCU) simulation to communicate with Battery management system (BMS) during battery pack test.



## BATTERY CHARGE/DISCHARGE SOFTWARE - BATTERY PRO

The software platform Battery Pro applies to Chroma 17040E and conforms to the diverse requirements for testing secondary battery packs with a high degree of safety and stability. It can save and restore data when the power is cut off to guard against potential data loss. The real-time monitor manages the test status through a variety of icons for clear multi-channel battery pack status browse. And have the operation and fault records with independent channel abnormalities.

- Multilingual interface: English and Chinese (Mandarin)
- User permission setup: easy management of user operation authorities

### Step Editing


- 255 editable charge and discharge conditions
- Dual layer loops (cycle & loop) with 9,999 per layer
- Editable dynamic charge and discharge waveforms
- Editable charge/discharge conditions incl. CV, CC, CP, CV, with current limit, waveform current, DCIR
- Cut-off conditions: time, power, voltage, current, temperature
- Step completed: next, end, jump, rest

### Report Wizard

- Customized report formats, exports in PDF, CSV, and XLS
- Users can determine the X- and Y-axis parameters for report drawing and analysis, and directly produce the necessary test reports
- Reports generated: channel, cut-off, life-cycle, Q-V, V/I/T, etc.



BatteryPro main window


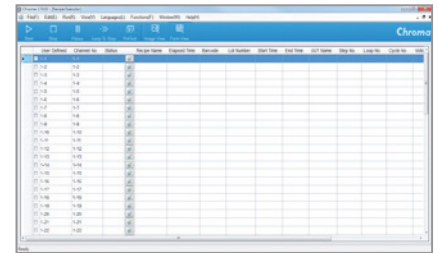


### Recipe Executor

- Data display updates automatically in real time
- Flexible graphic and toolbar display based on the number of channels

### Data Analyzer

- Draw test charts at one click
- Define chart and favorite functions
- Compare multiple test objects

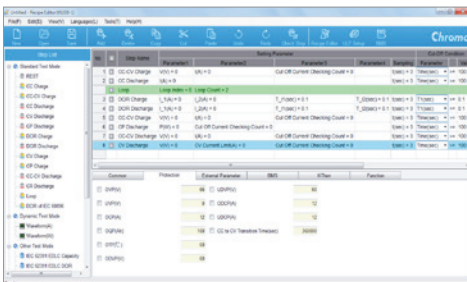

### Recipe Editor

- ISO 12405, GB/T 31467, GB/T 31484, IEC 61960 DCIR and other test curves
- Interface for setting BMS data control charge/discharge equipment
- Variable editing functions, external parameters, if-then judgment functions

## SPECIFICATIONS

Model			
Max Power / CH		200kW	
Voltage Range*4		100~1700V 50~850V	
Max Current / CH		400A at 1700V range 800A at 850V range	
Channel		1CH	
Max Power in Parallel Mode*14		400kW (2 units) 1.2MW (6 units) *14	
Control			
Constant Voltage Mode			
Voltage Range *4		100~1700V 50~850V *14	
Voltage Accuracy		0.1%F.S.	
Voltage Resolution		40mV	
Constant Current Mode			
Max. Current / CH		400A/800A	
Current Accuracy		0.1%F.S.	
Current Resolution / CH		10mA	
Max. Current / System*14		2,400A	
Constant Power Mode			
Max Power / CH		200kW	
Power Accuracy		0.2%F.S.	
Power Resolution / CH		1W	
Measurement			
Voltage Accuracy		±0.02% rdg + 0.02% rng	
Voltage Range & Voltage Resolution (4 Scales as F.S.)	1	0~1700V	40mV
	2	0~1200V	25mV
	3	0~600V	15mV
	4	0~150V*16	5mV
Current Accuracy		±(0.05% of r.n.g.)	
Current Accuracy & Current Resolution (4 Scales as F.S.)	1	400A	20mA
	2	200A	10mA
	3	100A	5mA
	4	50A	2mA
Current Rising / Falling Time (10% to 90%)			
Max. Power 800~1.2MW		10ms	
Max. Power 100~600kW		1ms	
Current Switching Time (-90% to 90% w/o dead time)			
Max. Power 800~1.2MW		20ms	
Max. Power 100~600kW		2ms	
Data Acquisition Time (HW sampling rate)			
Max. Power 100~600kW		1ms at waveform mode 10ms at CC, CV, CP mode	
Current Ripple		<0.5%	
Overshoot		<1%	
Over Current Capability*5		Over 20%, 30 sec. *14	
Operating Mode (Charge / Discharge)		Rest, CC charge, CC-CV charge, CC discharge, CV discharge, CP discharge, DCIR charge, DCIR discharge, CV charge, CP charge, CC-CV charge, CR discharge, CPCC charge, CPCC discharge, waveform power, waveform current, CV source, Chamber control, CAN write data, digital output control, wait digital input state	
Line Voltage / Frequency (3 phase/4 wire with earth ground)		380~400Vac ± 10% VLL , 50/60Hz 440~480Vac ± 10% VLL , 50/60Hz	
Cabinet Dimension (W x D x H)		230cm x 100cm x 190cm	
Cabinet Weight		≒ 2,500kg	
Front / Top side for heat dissipation		60cm	
Front / Rear / Right /Left side for maintenance *6		60cm	

## GENERAL SPECIFICATIONS

Model	17040E
Power Factor	> 0.95 (at rated power)
I_T.H.D	< 5% (at rated power)
Regenerate Efficiency at >50% of rated power	>92%
Leakage current protection (AC input Leakage Current)	Yes, >30mA
Temperature Coefficient (Voltage/Current)	<200 ppm/°C
Operating Temperature	0°C~40°C
Storage Temperature	-20°C~60°C
Operating Humidity	5~80%, non-condensing
Protection	OVP, UVP (6V to 1720V), OCP, OPP, OTP, FAN
Safety & EMC	CE UKCA*10
The Test of Regenerative Certification (option) *11	VDE-AR-N 4105 *15 VDE-AR-N 4110 *15
Isolate Protection (option) *12	Follow iso685 setting *14 Automatic adaptation to the existing system leakage capacitance Two separately adjustable response value ranges of 1 kΩ to 10 MΩ Locating current injection for selective insulation fault location
Communication Interface*13	Ethernet (RJ45 x 2)
Noise Level (Standby / Operating)	<80dB
Cooling Type	Air
<b>Control Interface for System integrator</b>	
Communication Interface	CANbus
Connector	1 x DB9 male connector
Channels	1CH
Protocol	CAN 2.0A (11-bit) / Extended CAN 2.0B (29-bit)
Data Transfer Rate	Up to 1 Mbit/s via CANbus
CAN Transceiver	ADM3054 (compatible with ISO 11898-2)
Signal Support	CAN_H, CAN_L
Isolation Protection	4 kV rms signal isolated CAN transceiver
Communication Interface	Analog programming interface *14
Analog Output (Measurement Volt. & Current)	2 ports (2 wires)
Voltage and Current Monitor/ Programming (Resolution/ Voltage Range/ Response time/ Input Impedance)	16 bit / ±10V / <3ms / 10Mohm
Analog Input (Current Control)	1 port (2 wires)
Analog Input (Voltage Control)	1 port (2 wires)
Latency Time	5ms
Safety Interface	Digital input/ output interface for safety *14
Isolated Digital I/O	32 ports input pin 32 ports output pin
Isolated Digital Input	Logic 0 (VL): 0~0.8V Logic 1 (VH): 1.2Vmin (24 V max.)
Isolated Digital Output	Output Type: Dry Contact Open: high ; Close: Low Output Voltage 5~24 VDC / Sink Current 1A max.

\*1\*2\*3: All specifications are subject to change without notice.

\*4: The output range of voltage is referred by the cabling. The connection between the device and battery is 10 meters long as standard accessory.

\*5: User have to reduce the power load of the test system from 115% to 25% of the power and rest for 10 minutes after finishing the "over current capability".

\*6: Please reserve distance of maintenance space for equipment placement.

\*7: When the rated load change from 10% to 90%, the item is stability time of voltage.

\*8: When the bi-directional rated load change from -90% to 90%, the item is stability time of voltage.

\*9: The spending time from zero to the maximum voltage is at no-load condition.

\*10: UKCA certification is applying.

\*11: Please refer to the Chroma User Manual for the announcement content.

\*12: The core part of isolated states is via Bender ISO685.


\*13: The interface between BatteryPro (IPC) to 17040E is through Ethernet.

\*14: This is used for specific application, please contact Chroma's sales representative.

\*15: VDE test report is applying.

\*16: The voltage accuracy is ( $\pm 0.05\%$ rdg).

## HARDWARE CONFIGURATION

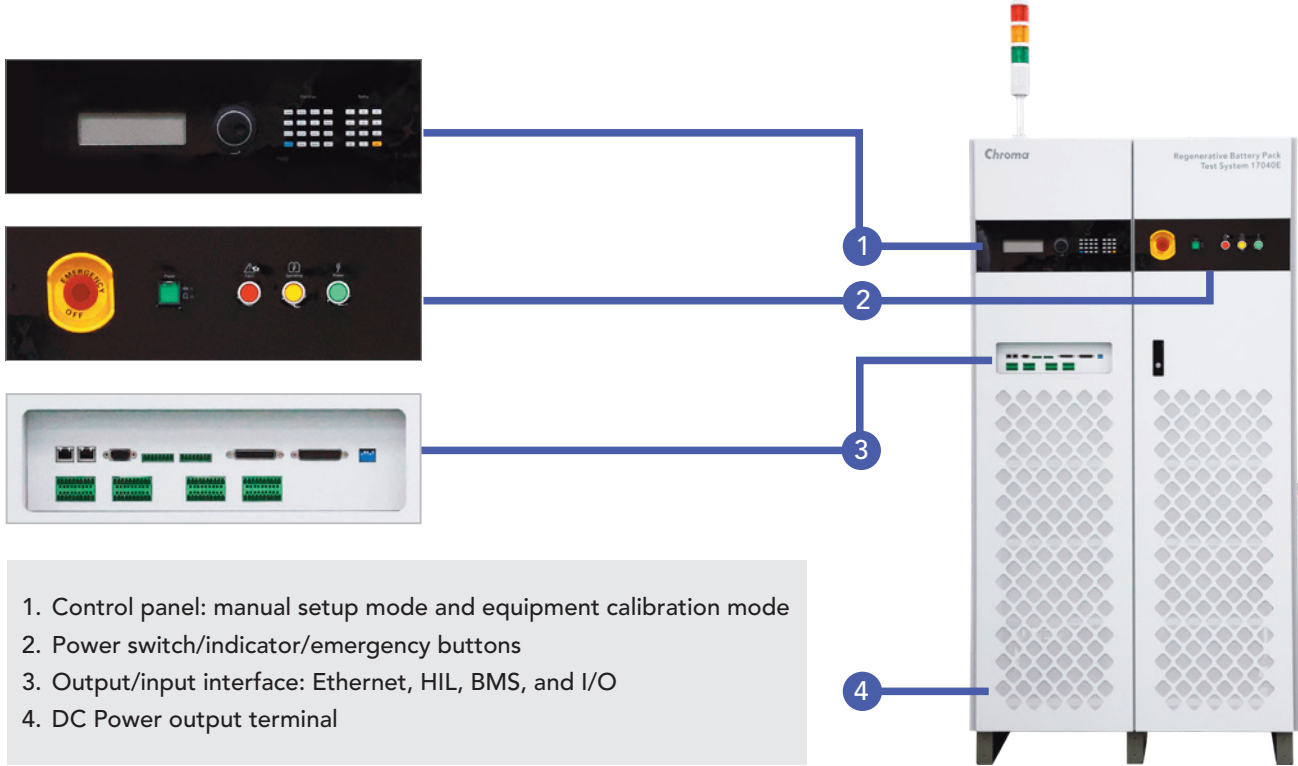

## ORDER INFORMATION

### Regenerative Battery Pack Test System Model 17040E

Power Range	Voltage	Current	Channels	AC Input
200kW	1,700V	800A	1	AC input 380Vac ; AC input 480Vac

Options	
A170201	IPC for Battery Test System
A170202	Battery Simulator SoftPanel
A170402	Battery Pro Software - Battery Pro
Vector 1630/ 1640	CAN Bus Interface Card

Get more product & global distributor information in Chroma ATE APP



iOS



Android

Search Keyword

17040E

HEADQUARTERS  
 CHROMA ATE INC.  
 88 Wenmao Rd.,  
 Guishan Dist.,  
 Taoyuan City  
 333001, Taiwan  
 T +886-3-327-9999  
 F +886-3-327-8898  
 www.chromaate.com  
 info@chromaate.com

U.S.A.  
 CHROMA SYSTEMS  
 SOLUTIONS, INC.  
 19772 Pauling,  
 Foothill Ranch,  
 CA 92610  
 T +1-949-600-6400  
 F +1-949-600-6401  
 www.chromausa.com  
 sales@chromausa.com

EUROPE  
 CHROMA ATE EUROPE B.V.  
 Morsestraat 32, 6716 AH  
 Ede, The Netherlands  
 T +31-318-648282  
 F +31-318-648288  
 www.chroma.eu.com  
 salesnl@chroma.eu.com

CHROMA GERMANY GMBH  
 Südtiroler Str. 9, 86165,  
 Augsburg, Germany  
 T +49-821-790967-0  
 F +49-821-790967-600  
 www.chroma.eu.com  
 salesde@chroma.eu.com

JAPAN  
 CHROMA JAPAN  
 CORP.  
 888 Nippa-cho,  
 Kouhoku-ku,  
 Yokohama-shi,  
 Kanagawa,  
 223-0057 Japan  
 T +81-45-542-1118  
 F +81-45-542-1080  
 www.chroma.co.jp  
 info@chroma.co.jp

KOREA  
 CHROMA ATE  
 KOREA BRANCH  
 3F Richtogether  
 Center, 14,  
 Pangyoyeok-ro 192,  
 Bundang-gu,  
 Seongnam-si,  
 Gyeonggi-do  
 13524, Korea  
 T +82-31-781-1025  
 F +82-31-8017-6614  
 www.chromaate.co.kr  
 info@chromaate.com

CHINA  
 CHROMA ELECTRONICS  
 (SHENZHEN) CO., LTD.  
 8F, No.4, Nanyou Tian  
 An Industrial Estate,  
 Shenzhen, China  
 T +86-755-2664-4598  
 F +86-755-2641-9620  
 www.chroma.com.cn  
 info@chromaate.com

SOUTHEAST ASIA  
 QUANTEL PTE LTD.  
 (A company of Chroma Group)  
 25 Kallang Avenue #05-02  
 Singapore 339416  
 T +65-6745-3200  
 F +65-6745-9764  
 www.quantel-global.com  
 sales@quantel-global.com