

## P/N: 83225-0101

### Copyright

© 2018, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

### Document identity

Publ. No.: 83225-0101

Release:

Commit: 47932

Language: en-US

Modified: 2018-03-06

Formatted: 2018-05-24

### Website


<http://www.flir.com>

### Customer support

<http://support.flir.com>

### Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to [exportquestions@flir.com](mailto:exportquestions@flir.com) with any questions.

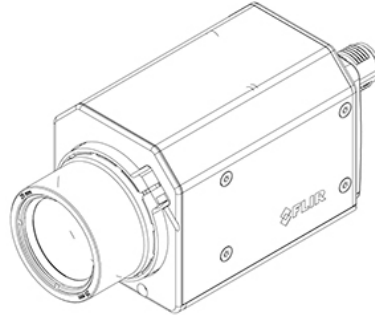

General description	
<p>The FLIR A35 has features and functions that make it the natural choice for anyone who uses PC software to solve problems and for whom 320 × 256 pixel resolution is sufficient.</p> <p>Among its main features are GigE Vision and GenICam compliance, which makes it plug-and-play when used with software packages such as IMAQ Vision and Halcon.</p>	
Key features:	
<ul style="list-style-type: none"> <li>• Very affordable.</li> <li>• Compact</li> <li>• GigE Vision and GenICam compliant.</li> <li>• GigE Vision lockable connector.</li> <li>• PoE (power over Ethernet).</li> <li>• 8-bit 320 × 256 pixel images streamed at 60 Hz, signal linear.</li> <li>• 14-bit 320 × 256 pixel images streamed at 60 Hz, signal and temperature linear.</li> <li>• High frame rates (60 Hz).</li> <li>• Synchronization between cameras possible.</li> <li>• 1x+1x GPIO.</li> <li>• Compliant with any software that supports GenICam, including National Instruments IMAQ Vision, Stemmers Common Vision Blox, and COGNEX Vision Pro.</li> </ul>	
Typical applications:	
<ul style="list-style-type: none"> <li>• Automation and thermal machine vision.</li> <li>• Entry level “high-speed” R&amp;D.</li> </ul>	
Imaging and optical data	
IR resolution	320 × 256 pixels
Thermal sensitivity/NETD	< 0.05°C @ +30°C (+86°F) / 50 mK
Field of view (FOV)	13° × 10°
Minimum focus distance	30 cm (12 in.)
Focal length	25 mm (0.98 in.)
Spatial resolution (IFOV)	0.680 mrad
F-number	1.1
Image frequency	60 Hz
Focus	Fixed
Detector data	
Detector type	Focal plane array (FPA), uncooled VOX microbolometer
Spectral range	7.5–13 μm
Detector pitch	17 μm
Detector time constant	Typical 12 ms

P/N: 83225-0101

© 2018, FLIR Systems, Inc.

#83225-0101; r. /47932; en-US

Measurement	
Object temperature range	<ul style="list-style-type: none"> <li>-25 to +100°C (-13 to 212°F)</li> <li>-40 to +550°C (-40 to +1022°F)</li> </ul>
Accuracy	±5°C (±9°F) or ±5% of reading

Measurement analysis	
Atmospheric transmission correction	Automatic, based on inputs for distance, atmospheric temperature and relative humidity
Optics transmission correction	Automatic, based on signals from internal sensors
Emissivity correction	Variable from 0.5 to 1.0
Reflected apparent temperature correction	Automatic, based on input of reflected temperature
External optics/windows correction	Automatic, based on input of optics/window transmission and temperature
Measurement corrections	Global object parameters

Ethernet	
Ethernet	Control and image
Ethernet, type	Gigabit Ethernet
Ethernet, standard	IEEE 802.3
Ethernet, connector type	RJ-45
Ethernet, communication	GigE Vision ver. 1.2 Client API GenICam compliant
Ethernet, image streaming	8-bit monochrome @ 60 Hz <ul style="list-style-type: none"> <li>Signal linear/ DDE</li> <li>Automatic/ Manual</li> <li>Flip H&amp;V</li> </ul> 14-bit 320 × 256 pixels @ 60 Hz <ul style="list-style-type: none"> <li>Signal linear/ DDE</li> <li>Temperature linear</li> </ul> GigE Vision and GenICam compatible
Ethernet, power	Power over Ethernet, PoE IEEE 802.3af class 0 Power
Ethernet, protocols	TCP, UDP, ICMP, IGMP, DHCP, GigEVision

Digital input/output	
Digital input, purpose	General purpose
Digital input	1× opto-isolated, "0" <1.2 VDC, "1" = 2–25 VDC.
Digital output, purpose	General purpose output to ext. device (programmatically set)
Digital output	1× opto-isolated, 2–40 VDC, max. 185 mA
Digital I/O, isolation voltage	500 VRMS
Digital I/O, supply voltage	2–40 VDC, max. 200 mA
Digital I/O, connector type	12-pole M12 connector (shared with Digital synchronization and External power)
Synchronization in, purpose	Frame synchronization in to control camera
Synchronization in	1×, non-isolated
Synchronization in, type	LVC Buffer @3.3V, "0" <0.8 V, "1">2.0 V.
Synchronization out, purpose	Frame synchronization out to control another FLIR Ax5 camera

P/N: 83225-0101

© 2018, FLIR Systems, Inc.

#83225-0101; r. /47932; en-US

Digital input/output	
Synchronization out	1x, non-isolated
Synchronization out, type	LVC Buffer @ 3.3V, "0"=24 MA max, "1"= -24 mA max.
Digital synchronization, connector type	12-pole M12 connector (shared with Digital I/O and External power)

Power system	
External power operation	12/24 VDC, < 3.5 W nominal < 6.0 W absolute max.
External power, connector type	12-pole M12 connector (shared with Digital I/O and Digital Synchronization )
Voltage	Allowed range 10–30 VDC

Environmental data			
Operating temperature range	-15°C to +60°C (+5°F to +140°F)		
	<table border="1"> <thead> <tr> <th>NOTE</th> </tr> </thead> <tbody> <tr> <td>The operating temperature range assumes that the camera is mounted on the base support (included in the package) or a similar type of heatsink.</td> </tr> </tbody> </table>	NOTE	The operating temperature range assumes that the camera is mounted on the base support (included in the package) or a similar type of heatsink.
NOTE			
The operating temperature range assumes that the camera is mounted on the base support (included in the package) or a similar type of heatsink.			
Storage temperature range	-40°C to +70°C (-40°F to +158°F)		
Humidity (operating and storage)	IEC 60068-2-30/24 h 95% relative humidity +25° C to +40°C (+77°F to +104°F)		
EMC	<ul style="list-style-type: none"> <li>EN 61000-6-2 (Immunity)</li> <li>EN 61000-6-3 (Emission)</li> <li>FCC 47 CFR Part 15 Class B (Emission)</li> </ul>		
Encapsulation	IP 40 (IEC 60529) with base support mounted		
Shock	25 g (IEC 60068-2-27)		
Vibration	2 g (IEC60068-2-6) and MIL-STD810G		

Physical data	
Camera size (L x W x H)	107.8 x 49.6 x 46.6 mm (4.2 x 1.9 x 1.8 in.)
Tripod mounting	1 x UNC ¼"-20 (with Base support accessory, included in the delivery box )
Base mounting	4 x M3 thread mounting holes (bottom)
Housing material	Magnesium and aluminum

Shipping information	
Packaging, type	Cardboard box
List of contents	<ul style="list-style-type: none"> <li>Infrared camera with lens</li> <li>Base support</li> <li>Printed documentation</li> </ul>
EAN-13	7332558013113
UPC-12	845188014872
Country of origin	Sweden

### Supplies & accessories:

- T951004ACC; Ethernet cable CAT6, 2 m/6.6 ft.
- T198349; Base support
- T198348; Cable kit Mains (UK,EU,US)
- T127605ACC; Cable M12 Pigtail



## FLIR A35 FOV 13 (60 Hz, ver. 2017)

---

**P/N: 83225-0101**



© 2018, FLIR Systems, Inc.

#83225-0101; r. /47932; en-US




- T127606ACC; Cable M12 Sync
- T199698; Environmental housing for Ax5
- T199356; FLIR Ax5 accessory starter kit
- T198342ACC; Focus adjustment tool
- T911183; Gigabit PoE injector 16 W, with multi-plugs
- T198392; Table stand kit
- T198594ACC; Transport case Ax5
- T198584; FLIR Tools
- T198583; FLIR Tools+ (download card incl. license key)
- T199233; FLIR Atlas SDK for .NET
- T199234; FLIR Atlas SDK for MATLAB
- INST-EW-0135; Extended Warranty 1 Year for A35, A65
- INST-EWGM-0135; Extended Premier Warranty 1 Year for A35, A65, E50, E60, E63, E53, E75, E85, E95
- INST-GM-0125; Calibration incl General Maintenance for A35, A65, E30, E33, E40, E50, E60, E63, E53, E75, E85, E95, Kxx

Basic dimensions  
for cameras with  
focal length:  
f= 7,5 mm  
f= 9 mm  
f=13 mm  
f=19 mm

4x M3  
Depth max 4 mm

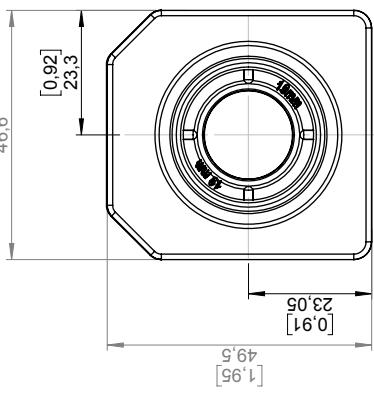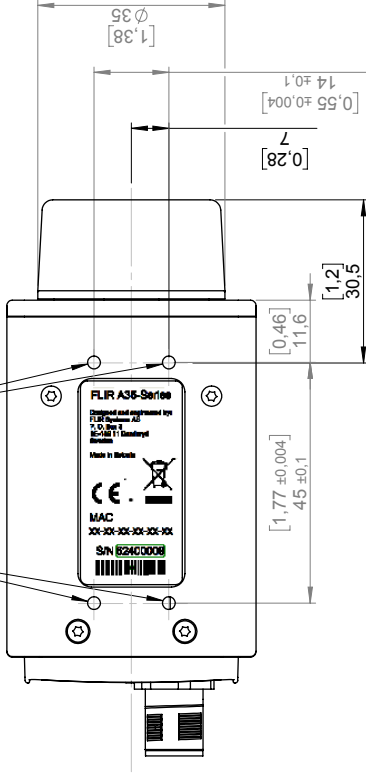

Connector GP I/O  
M12 12-pin

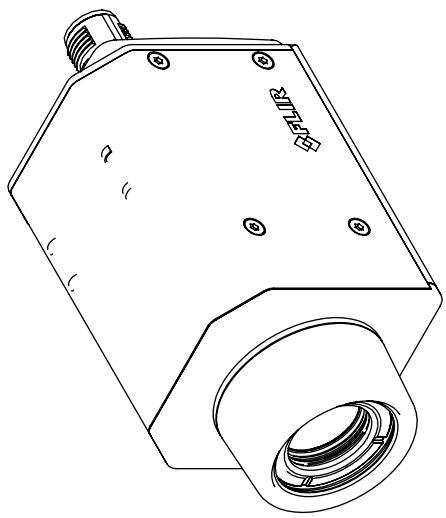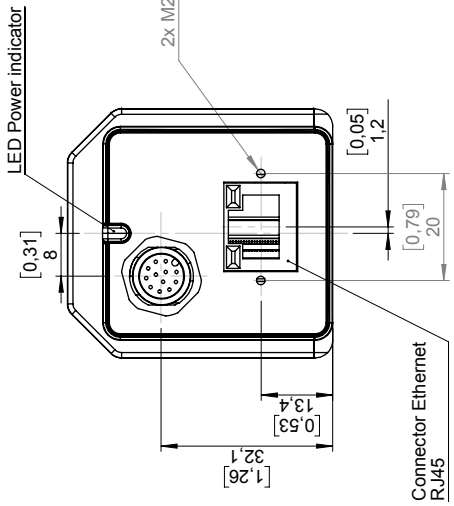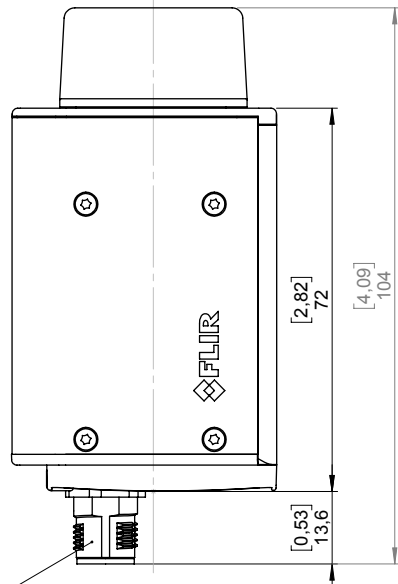

**FLIR**

BlackSheet  
Size  
A3  
Rev  
-002

Sheet/Scale  
1:1  
ARNO.





Rlin nr/Drawing No  
T129297

Konstr/Drawn <b>P. MARCUS</b>	Datum/Date 2015-12-14	Kontri/Check -	Material -
Ändrad av/Modified by <b>P. MARCUS</b>	Ändrad/Modified 2016-10-18	Yllämhet/Roughness Ra	Ytbehandling/Surface treatment µm
Benämning/Denomination Basic dimensions Ax5 w. flag shutter f=7.5 mm to f=100 mm			



Dir ej ansvar ägare/Unless otherwise stated  
Gen tol ISO 2768-mK  
Utdrag ur/Excerpt from ISO 2768-m

0,5-6 ±0,1 Hållisradier  
(6)-30 ±0,2 Fillet radii  
(120)-400 ±0,5 Kanter brutna  
(400)-1000 ±0,8 Edges broken






Basic dimensions for  
add-on base support

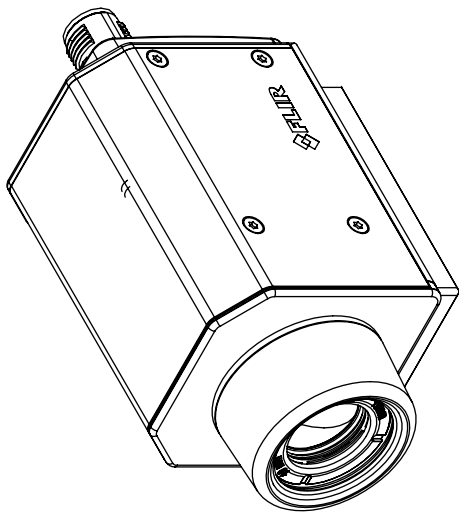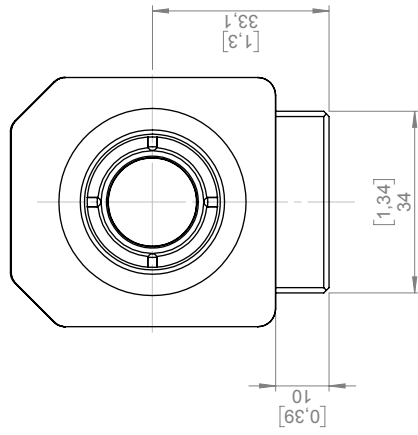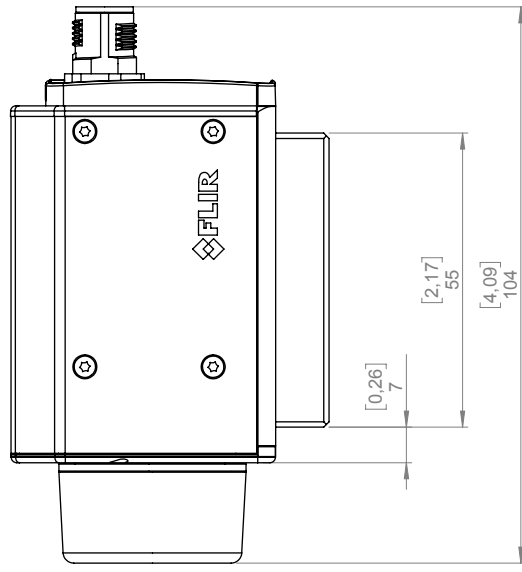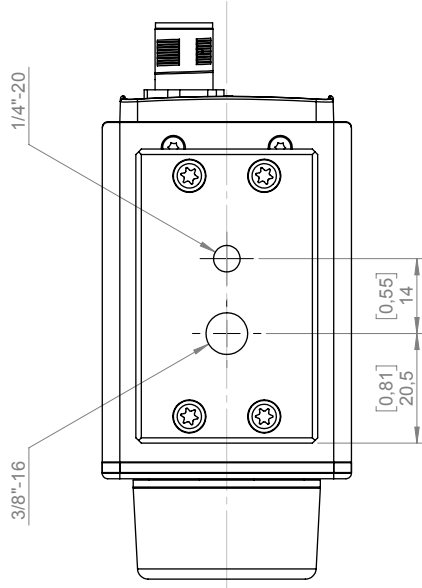

Konstr/Drawn <b>P. MARCUS</b>		Datum/Date <b>2015-12-14</b>	Kontr/Check -	Material -
Ändrad av/Modified by <b>P. MARCUS</b>		Ändrad/Modified <b>2016-10-18</b>	Ytjämnhet/Roughness Ra	Ytbehandling/Surface treatment
Där ej annat anges/Unless otherwise stated Utdrag ur/Excerpt from ISO 2768-m		Benämning/Denomination		
0,5-6 0,1 0,2 0,1 0,2 0,5 0,8		Hålålsradier Fileradii Kantler brutna Edgese broken		
-		Scale/Scale 1:1		
-		Blad/Sheet 2(7)		
-		SIS A3		
-		Rev -		
-		Ritning/Drawing No. T129297		
Basic dimensions Ax5 w. flag shutter f=7,5 mm to f=100 mm				

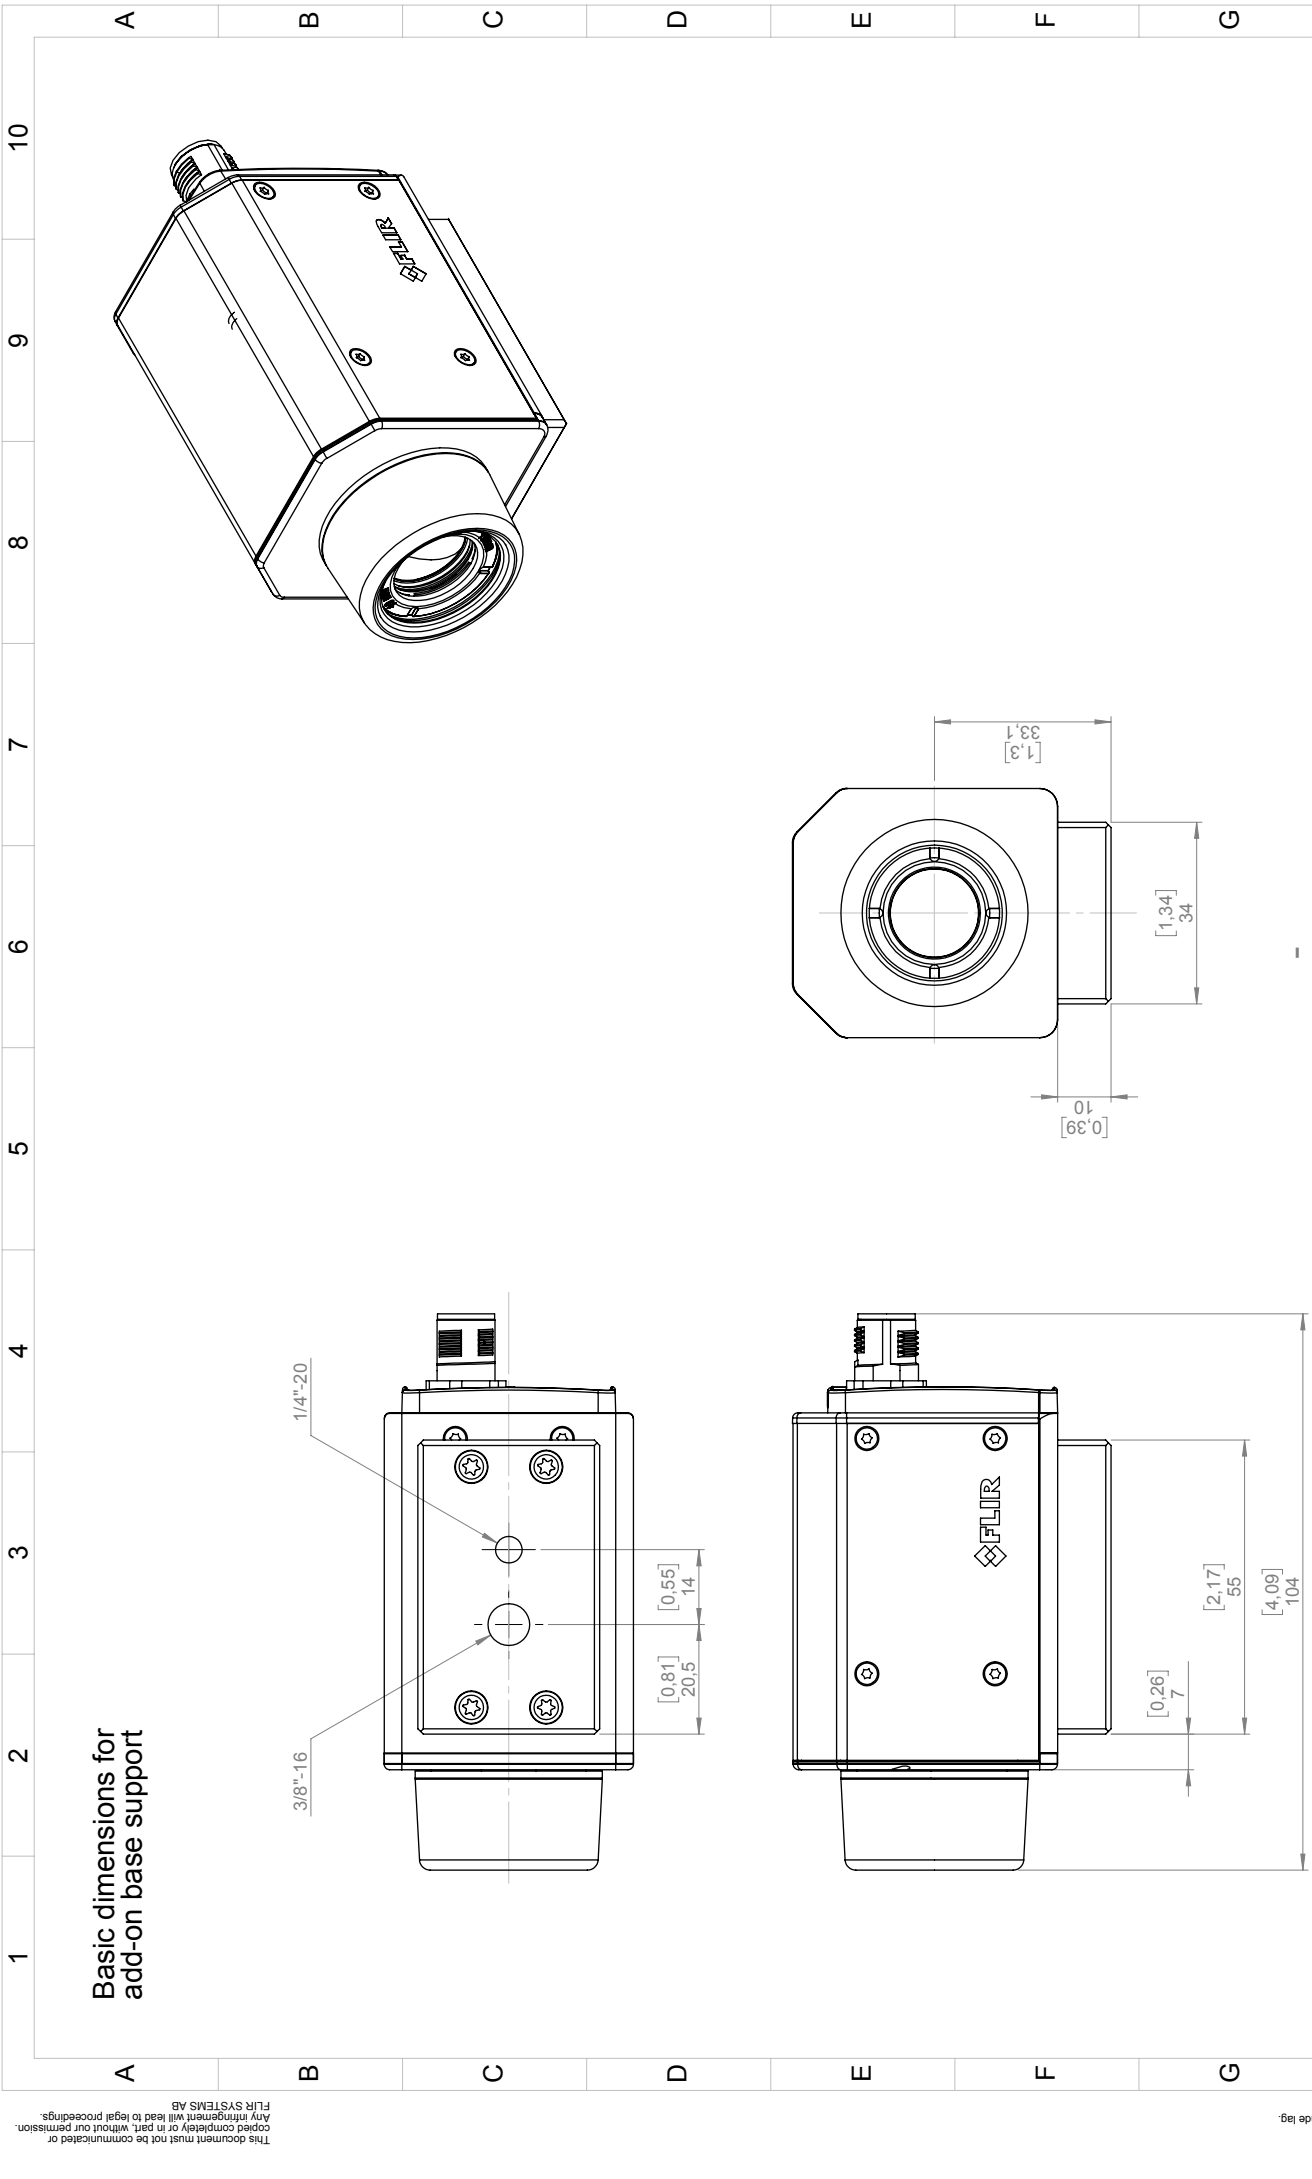

Basic dimensions:  
 Camera with focal length  
 f=25 mm IR lens.  
 Only dimensions valid for  
 this IR lens.  
 For all other dimensions see pages  
 1 and 2.

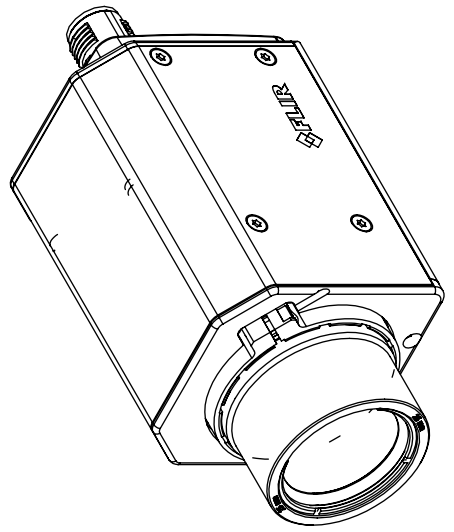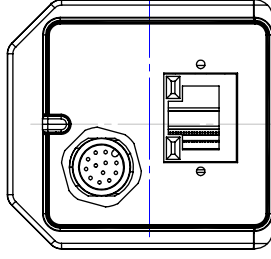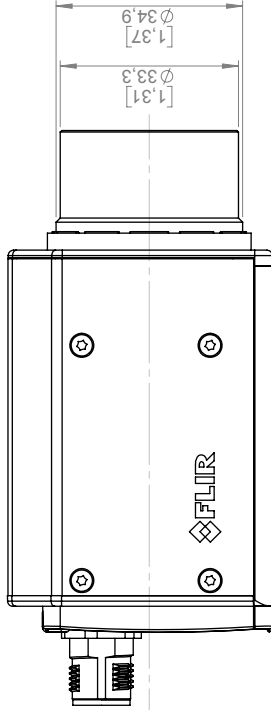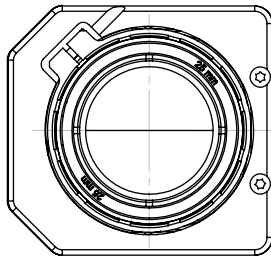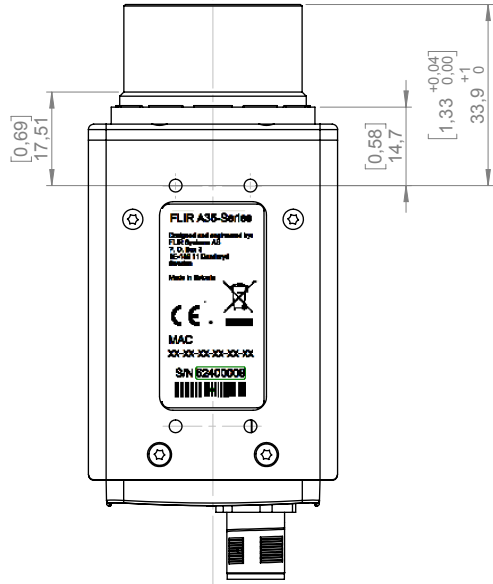

Konstr/Drawn <b>P. MARCUS</b>		Datum/Date <b>2015-12-14</b>	Kontr/Check -	Material -
Ändrad av/Modified by <b>P. MARCUS</b>		Ändrad/Modified <b>2016-10-18</b>	Ytjämnhet/Roughness Ra	Ytbehandling/Surface treatment µm
Gen töl ISO 2768-mK Utöver utfrån ISO 2768-m		Benämning/Denomination Basic dimensions Ax5 w. flag shutter f=7,5 mm to f=100 mm		
0,5-6 0,7-30 0,2 120-400 40,5 400-1000 ±0,8		Höjlsradier Filter radii Kantler brutna Edges broken		
Blad/Sheet 3(7)		Skala/Scale 1:1		Rev A3
Ritning/Drawing No. T129297		Artno. -		



Scale/Scale  
1:1

Rev  
A3

Ritning/Drawing No.  
T129297

Artno.  
-

Basic dimensions Ax5 w. flag shutter  
f=7,5 mm to f=100 mm

0,5-6  
0,7-30  
0,2  
120-400  
40,5  
400-1000  
±0,8

Höjlsradier  
Filter radii  
Kantler brutna  
Edges broken

Blad/Sheet  
3(7)






Scale/Scale  
1:1

Rev  
A3


Ritning/Drawing No.  
T129297

Artno.  
-

Basic dimensions:  
 Camera with focal length  
 f=35 mm IR lens.  
 Only dimensions valid for  
 this IR lens.  
 For all other dimensions see pages  
 1 and 2.

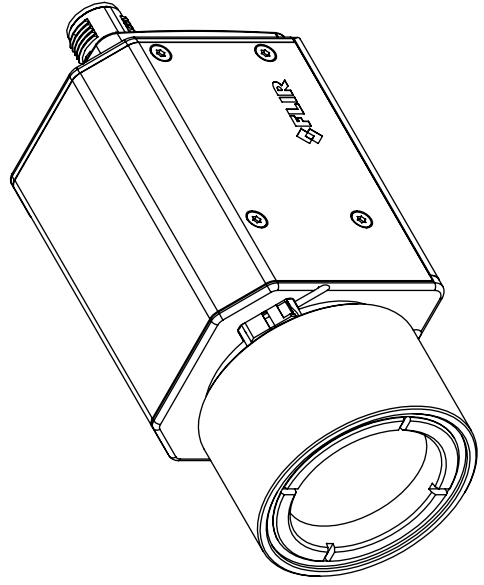
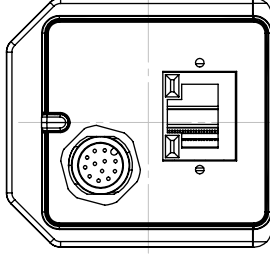
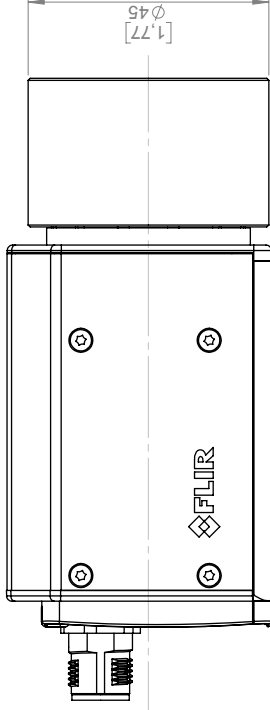
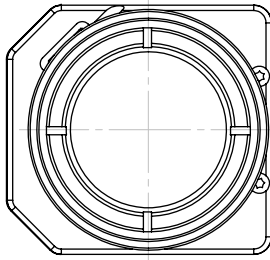
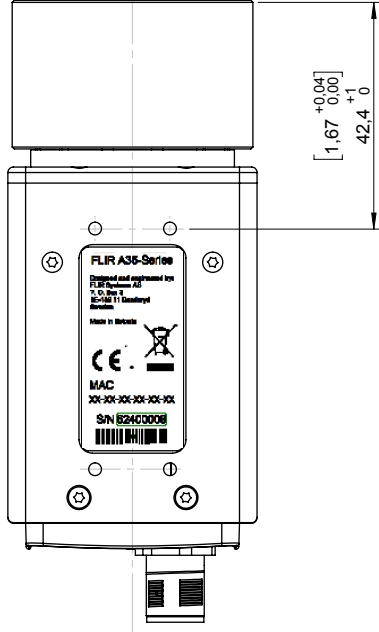


Konstr/Drawn <b>P. MARCUS</b>		Datum/Date <b>2015-12-14</b>	Kontr/Check -	Material -
Ändrad av/Modified by <b>P. MARCUS</b>		Ändrad/Modified <b>2016-10-18</b>	Ytjämnhet/Roughness Ra	Ytbehandling/Surface treatment µm
Där ej annat anges/Unless otherwise stated Utöver utöver/except from ISO 2768-m		Benämning/Denomination <b>Basic dimensions Ax5 w. flag shutter f=7,5 mm to f=100 mm</b>		
0,5-6 6,3-30 120-400 400-1000		Hål/sårradier Filer radii Kantlar brutna Edgese broken		
Stapel/Scale 1:1		Blad/Sheet 4(7)		
Sjös A3		Rev -		
Ritning/Drawing No. <b>T129297</b>		Ritning/Drawing No. <b>T129297</b>		

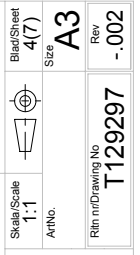








Basic dimensions:  
 Camera with focal length  
 $f=50$  mm IR lens.  
 Only dimensions valid for  
 this IR lens.  
 For all other dimensions see pages  
 1 and 2.

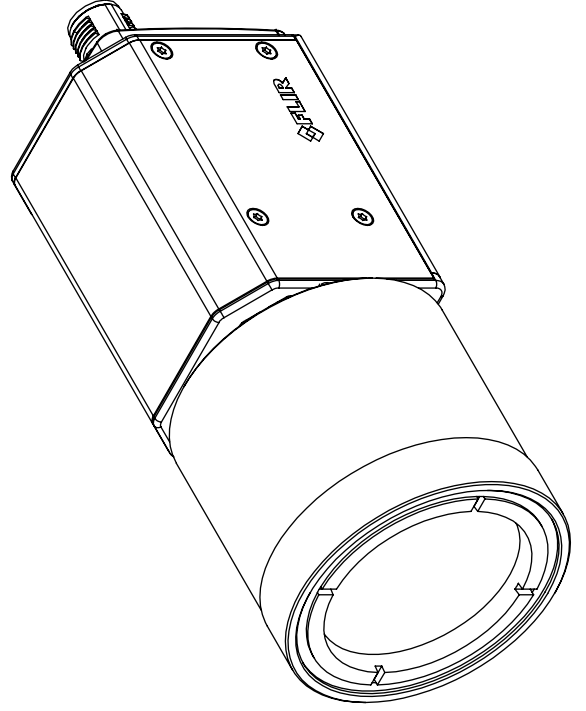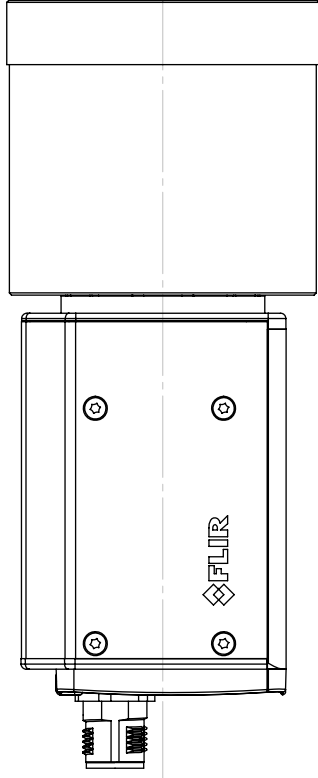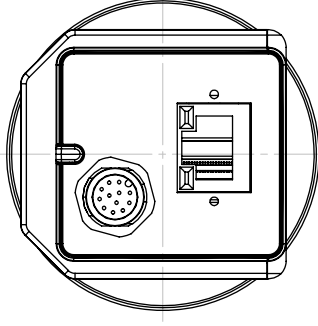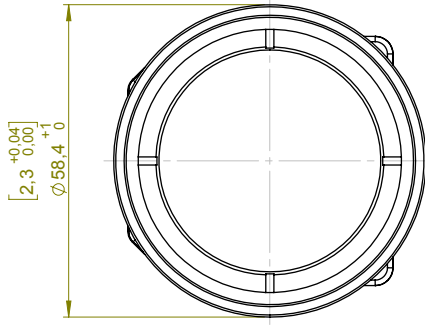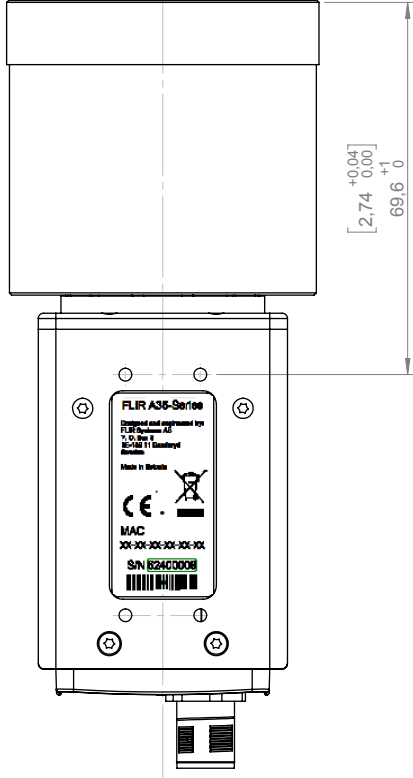

Konstr/Drawn <b>P. MARCUS</b>		Datum/Date <b>2015-12-14</b>	Kontr/Check -	Material -
Ändrad av/Modified by <b>P. MARCUS</b>		Ändrad/Modified <b>2016-10-18</b>	Ytjämnhet/Roughness Ra	Ytbehandling/Surface treatment µm
Där ej annat anges/Unless otherwise stated Utdrag ur/except from ISO 2768-m		Benämning/Denomination <b>Basic dimensions Ax5 w. flag shutter f=7,5 mm to f=100 mm</b>		
0,5-6 6,3-30 120-400 400-1000		Hålkalibrer Filter radi Kantler brutna Edgse broken		
Stapel/Scale 1:1		Blad/Sheet 5(7)		
Artno. T129297		Rev A3		
Ritning/Drawing No. T129297		-002		



Basic dimensions:  
 Camera with focal length  
 f=60 mm IR lens.  
 Only dimensions valid for  
 this IR lens.  
 For all other dimensions see pages  
 1 and 2.

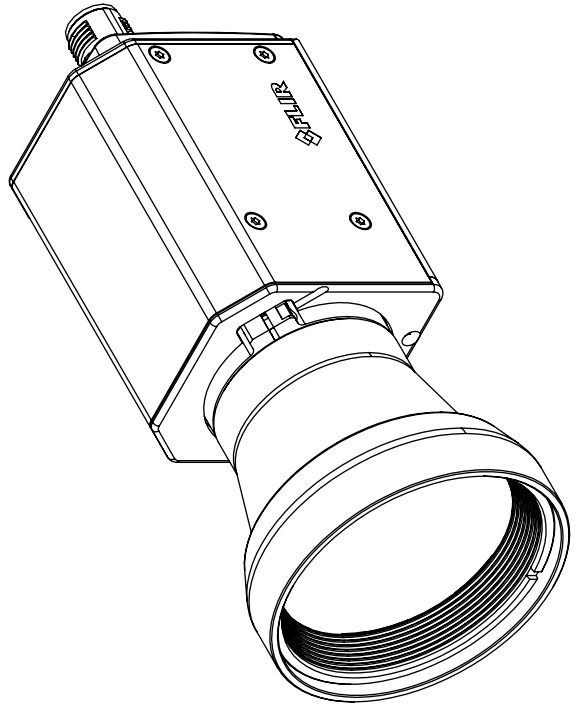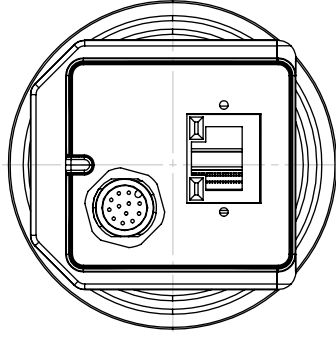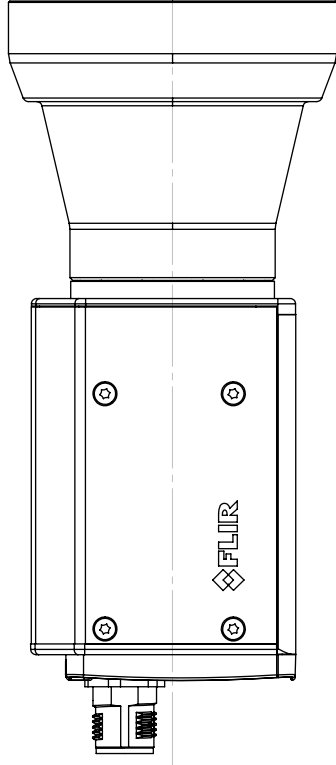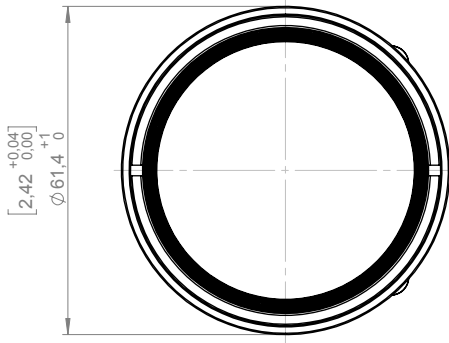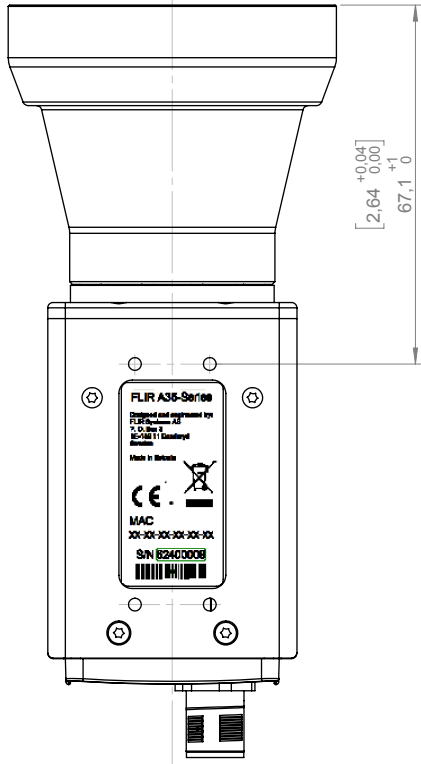


This document must not be communicated or copied completely or in part, without our permission. FLIR SYSTEMS AB

Denna handling får ej delges annan, kopieras i sin helhet eller delar utan vårt medgivande. Övertagelse härav beivras med stöd av gällande lag. FLIR SYSTEMS AB

Konstr/Drawn <b>P. MARCUS</b>	Datum/Date <b>2015-12-14</b>	Kontr/Check -	Material -
Ändrad av/Modified by <b>P. MARCUS</b>	Ändrad/Modified <b>2016-10-18</b>	Ytjämnhet/Roughness Ra	Ytbehandling/Surface treatment µm
Den till ISO 2768-mK Utdrag ur/except from ISO 2768-m	Där ej annat anges/Unless otherwise stated	Benämning/Denomination <b>Basic dimensions Ax5 w. flag shutter f=7,5 mm to f=100 mm</b>	
0,5-6 60-30 120-400 400-1000	+0,1 +0,2 +0,5 ±0,8	Hål/sår/radii Kantler brutna Eckiga brokna	
Scale/Scale 1:1		Blad/Sheet 6(7)	
ArtNo. T129297		SIS A3	
Rev -		Rin nr/Drawing No -002	



Basic dimensions:  
 Camera with focal length  
 f=100 mm IR lens.  
 Only dimensions valid for  
 this IR lens.  
 For all other dimensions see pages  
 1 and 2.

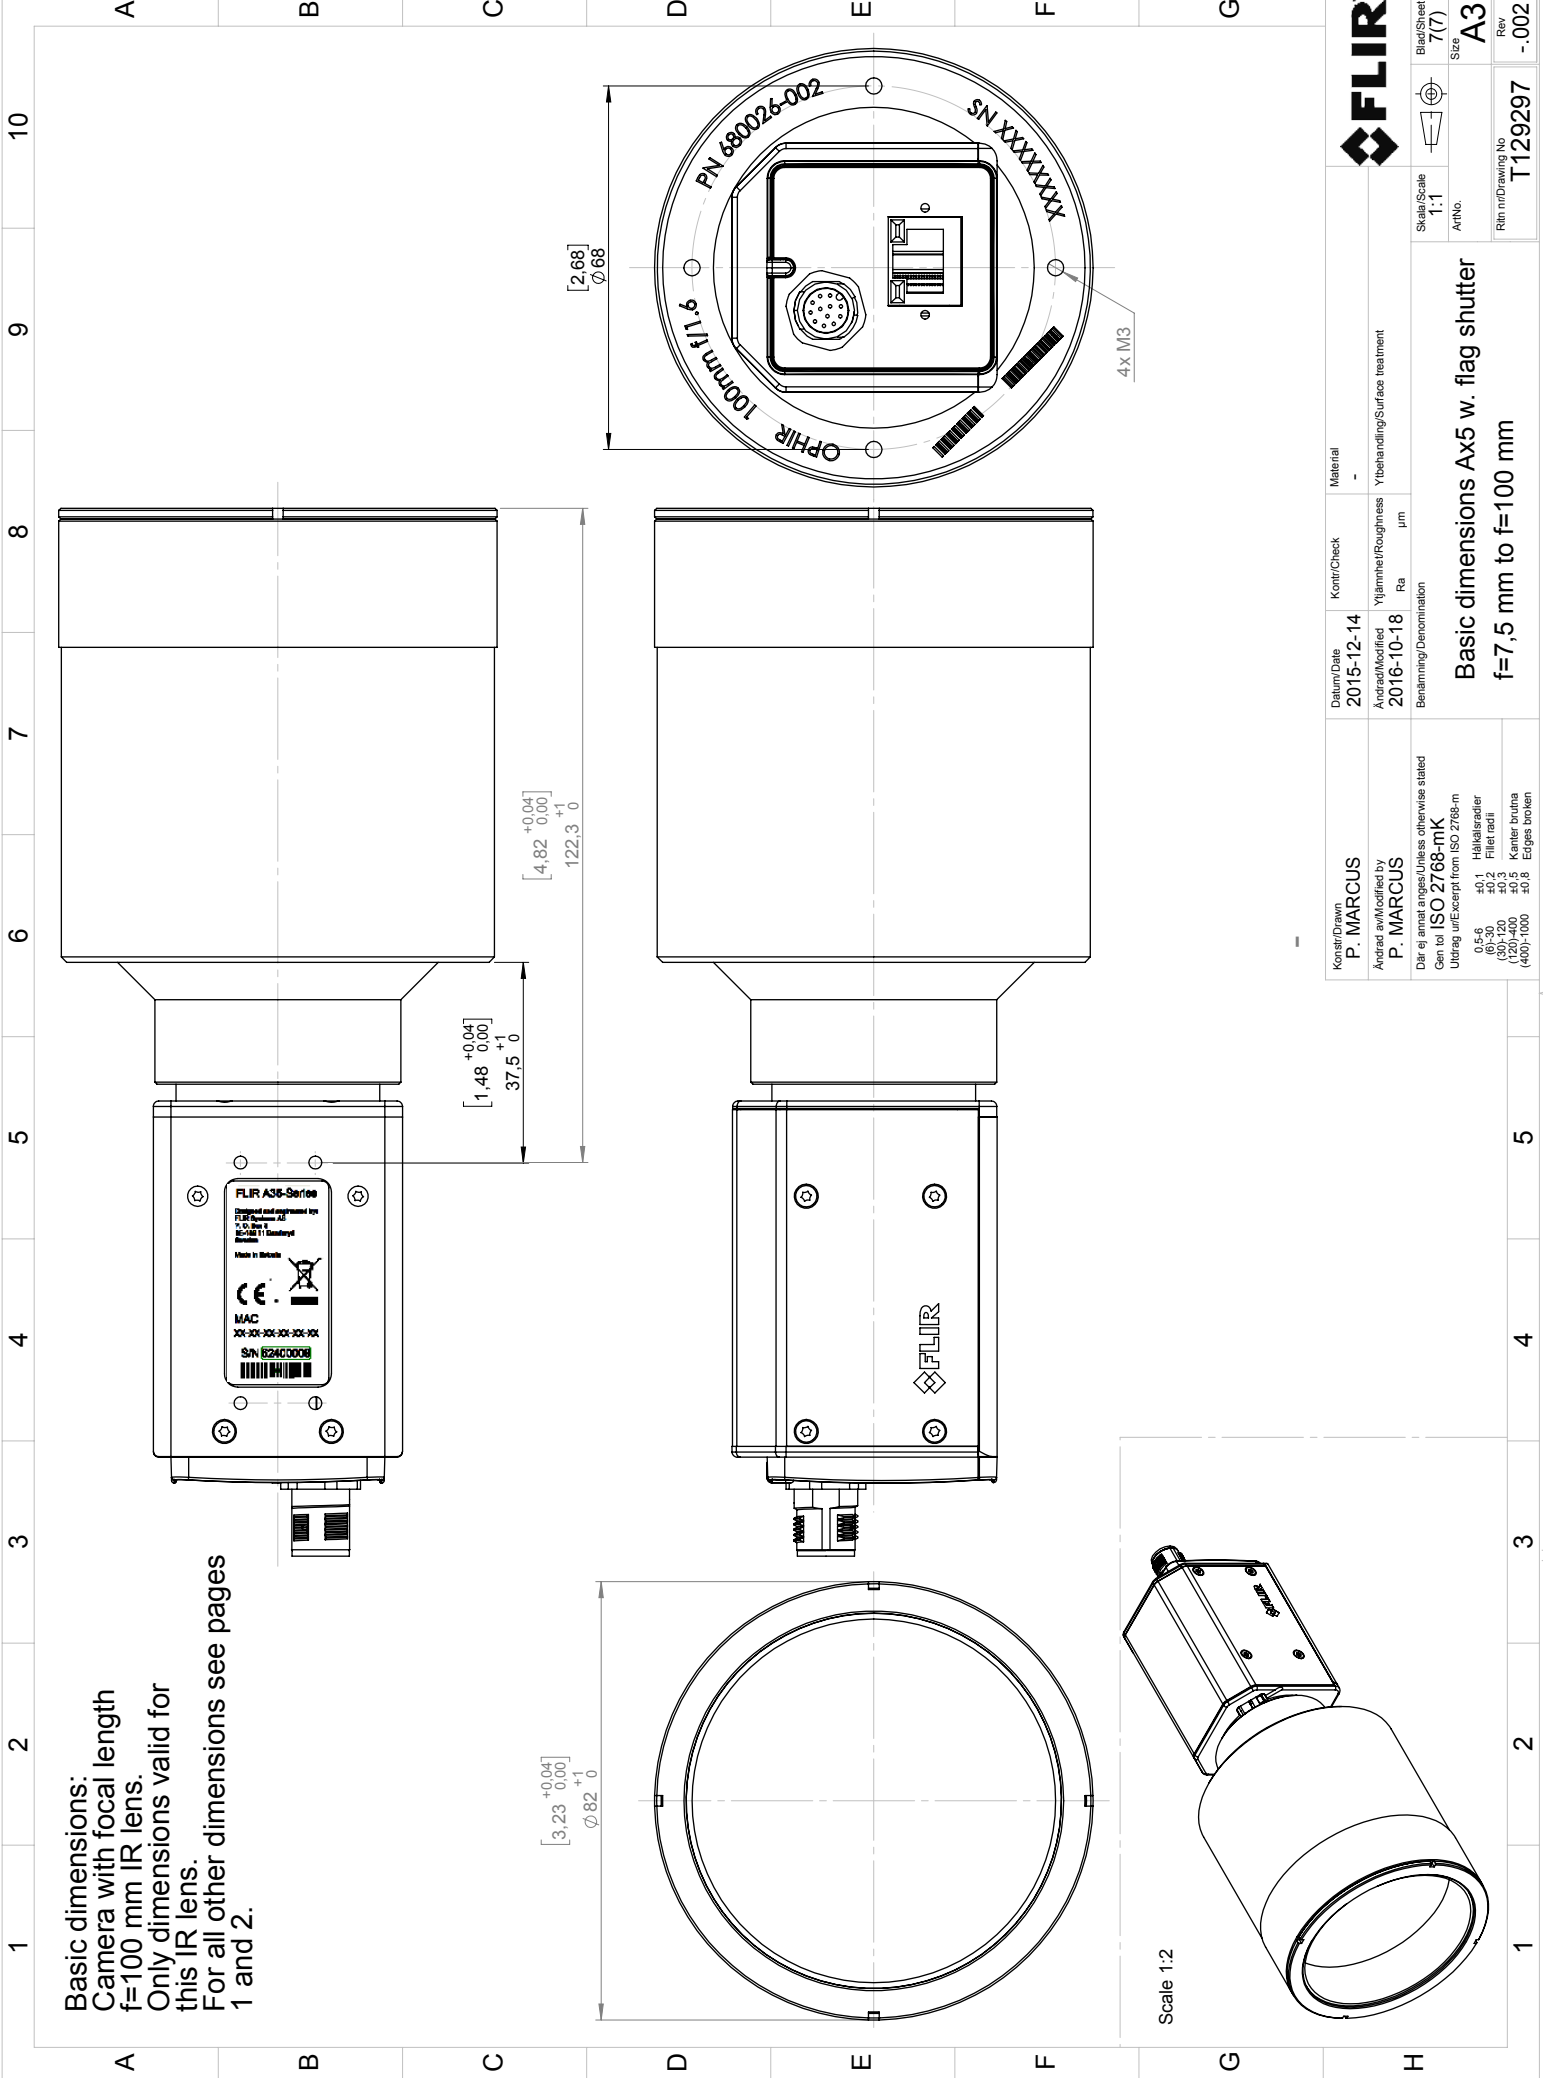

This document must not be communicated or copied completely or in part, without our permission. FLIR SYSTEMS AB

Den här handling får ej delas ut eller kopieras i sin helhet eller delar utan vårt medgivande. Övertalade hävar bevis med stöd av gällande lag. FLIR SYSTEMS AB

<b>FLIR</b>		Blad/Sheet 7(7)		Size A3		Rev -002	
Scale/Scale 1:1		ArtNo. T129297		Rin nr/Drawing No. T129297			
Konstr/Drawn P. MARCUS	Datum/Date 2015-12-14	Kontr/Check -	Material -	Basic dimensions Ax5 w. flag shutter f=7.5 mm to f=100 mm			
Ändrad av/Modified by P. MARCUS	Ändrad/Modified 2016-10-18	Ytjämnhet/Roughness Ra	Ytbehandling/Surface treatment µm				
Där ej annat anges/Unless otherwise stated Utdrag ur/Excerpt from ISO 2768-m							
0.5-6							
6.3-30							
(120)-400							
(400)-1000							
±0.1							
±0.2							
±0.5							
±0.8							
Höjlsradier							
Filer radii							
Kantler brutna							
Edges broken							

## CE Declaration of Conformity

This is to certify that the System listed below have been designed and manufactured to meet the requirements, as applicable, of the following EU-Directives and corresponding harmonising standards. The systems consequently meet the requirements for the CE-mark.

Directives:

**Directive 2004/108/EC;** **Electromagnetic Compatibility**  
**Directive 2006/95/EC;** **“Low voltage Directive” (Power Supply)**  
**Directive 2002/96/EC** **Waste electrical and electronic equipment; WEEE**  
(As applicable)

Standards:


**Emission:** **EN 61000-6-3; Electromagnetic Compatibility**  
**Generic standards - Emission**

**Immunity:** **EN 61000-6-2; Electromagnetic Compatibility;**  
**Generic standards - Immunity**

**Safety (Power Supply):** **EN 60950; (or other) Safety of information technology**  
**equipment**

System: **FLIR AXX series**

FLIR Systems AB  
Quality Assurance



Björn Svensson  
Director